



FMR60 Overall Dimension:

Front Attachment

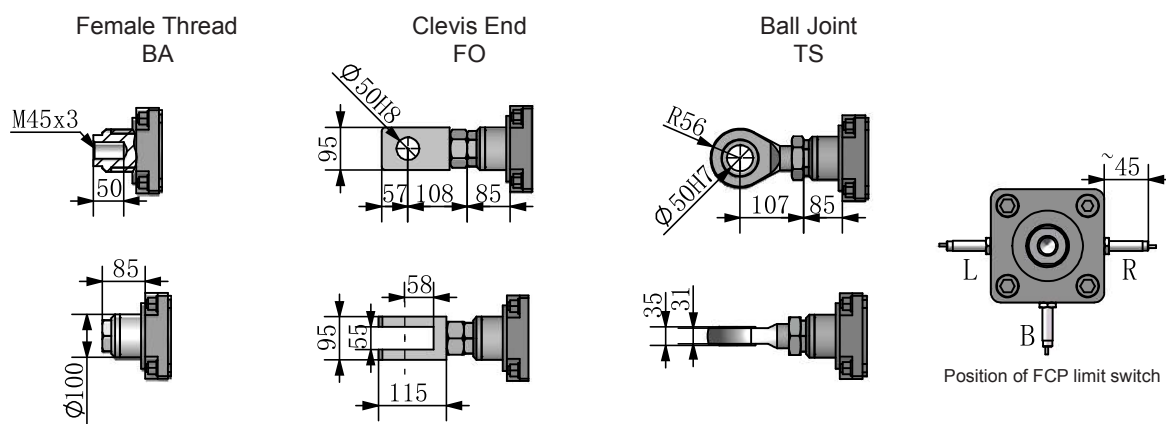


FMR60 Parallel dimension-P10,P20

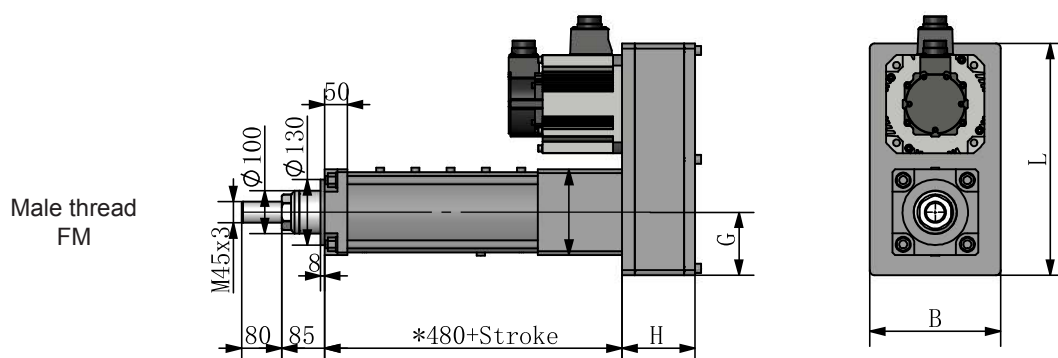

Power	H	L	B	G
Lower than 6KW	125	460	260	125
6KW-12KW	125	495	290	140
12KW-18KW	125	590	335	165


The dimension in above table is for reference only, the dimension will be different depends on different motor manufacturer.

FMR60 Rear clevis mounting-RC

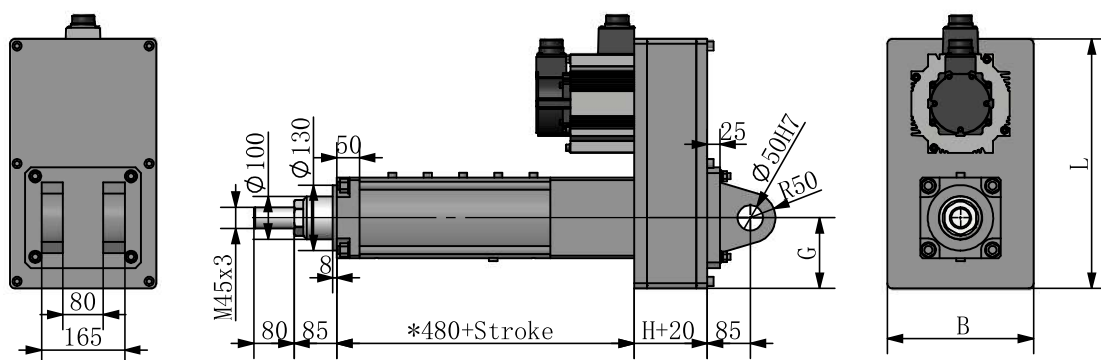


Unit: mm. * Indicates that the length is 480 mm when the lead is 20 mm, consult with Lim-Tec engineers when the lead is 10 mm.


FMR60 Front flange mounting-FF

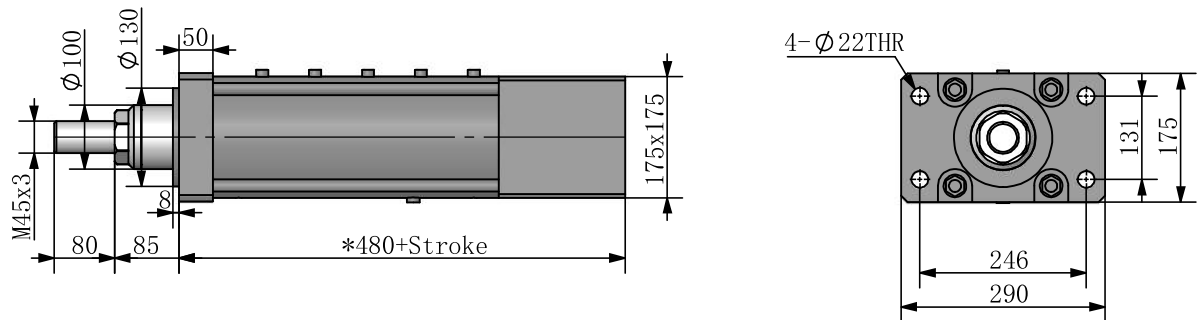


FMR60 Side flange mounting-SF

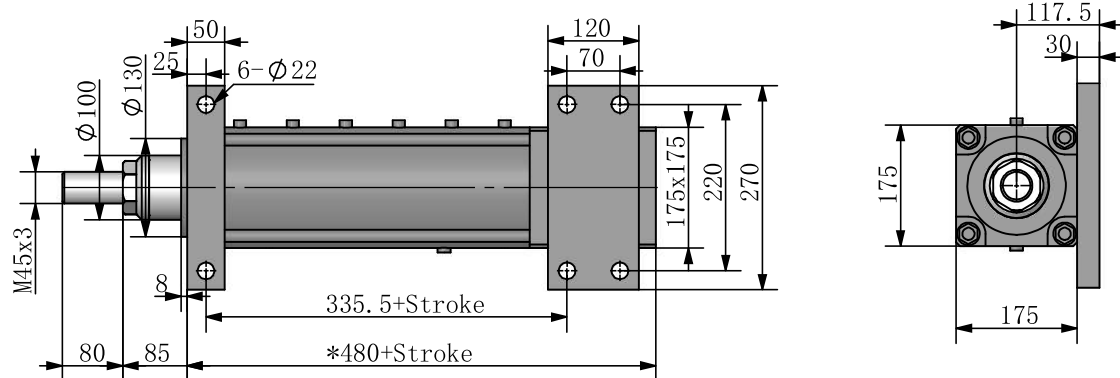

FMR60 Trunnion mounting-ST

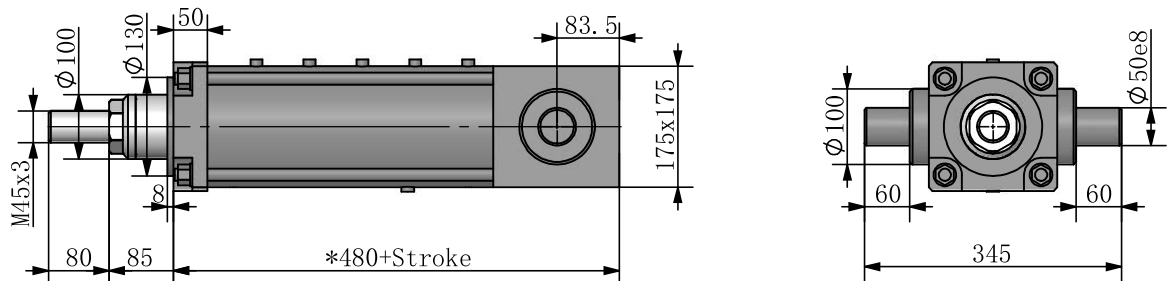

FMR60 Inline dimension-SC

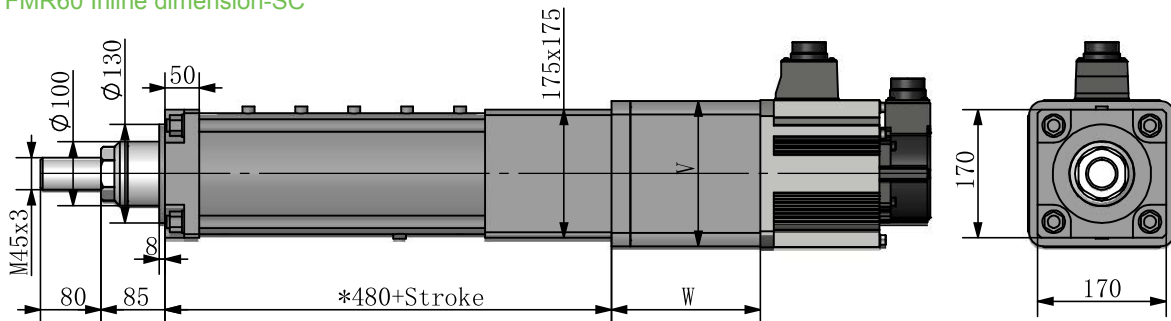

Power Size	Ratio	Lower than 6KW			6KW-12KW			12KW-18KW		
		1:1	3~10:1	15~100:1	1:1	3~10:1	15~100:1	1:1	3~10:1	15~100:1
W		215	357	447	245	428	522	300	526.5	577
V		192	192	192	260	260	260	280	280	280

The dimension in above table is for reference only, the dimension will be different depends on different motor manufacturer.